


INSTALLATION INSTRUCTIONS

Multi-Function Floor Drain

地漏安裝說明

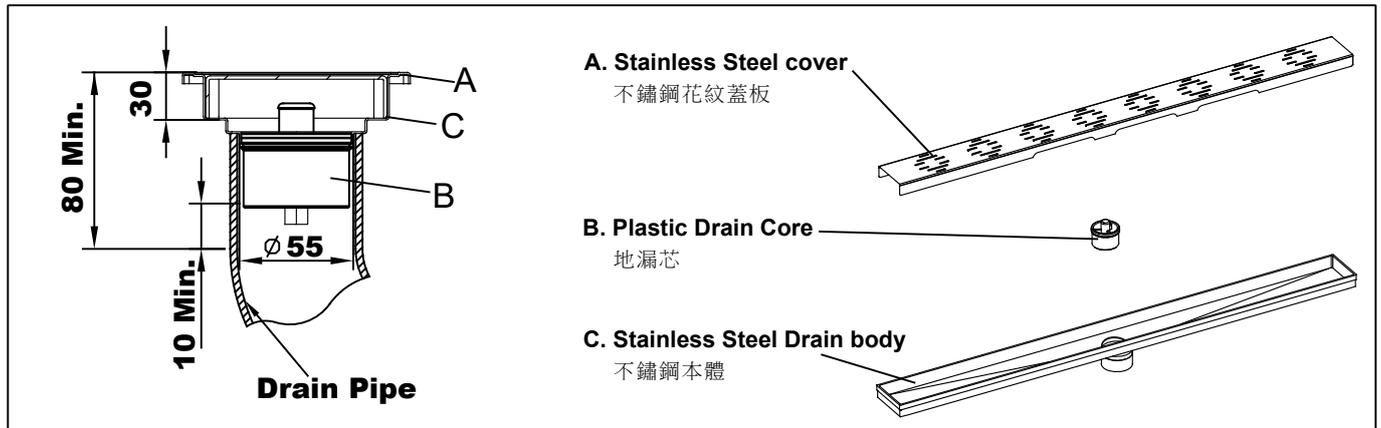

安裝方法 Installation

1. Remove the **Stainless Steel Cover**, **Plastic Drain Core** from the **Stainless Steel Drain body**.
將蓋板、地漏芯，從不鏽鋼體本體取出。
2. Apply the cement or other sealant around the underside of the flange of **Stainless Steel Drain body**. Place the drain body into the floor hole and level the drain body.
Notice : The drain surface should be lower than the floor.
將不鏽鋼本體的下沿塗上水泥或適量的密封劑。將不鏽鋼本體置入挖好的地漏坑內，排水口與下水道口對中，壓緊並抹平水泥。注意：平面應稍低於地面少許。
3. Assemble **Plastic Drain Core** and **Stainless Steel cover** into **Stainless Steel Drain body**.
將蓋板、地漏芯放入不鏽鋼體本體內。
4. Remove any excess cement or sealant.
請將地板多餘的水泥或密封劑清除。

安裝注意事項 Installation Attention

1. Inquire for an agent if there is any install question.
若安裝本產品有任何問題，請向專業人員詢問。
2. Make sure if there is at least 10 mm working space from the bottom of Plastic Drain Core to prevent inactive drain function. (Please see Fig.1)
確認地漏芯底部至彎頭底部至少有10mm空間。(請參照圖示1)

維護方法 Maintenance

Maintenance: You can follow step 1 to remove the Stainless Steel Cover, hook the Plastic Drain Core out of the Stainless Steel Drain Body, clean it, and then re-install it for reuse.

當自封蓋板結滿水垢影響密封時，可按步驟1，取出蓋板，將地漏芯從不鏽鋼本體鉤出清潔後，安裝好重新使用。

產品特點 Product Characters

1. Noise reduced, airtight & Beetle stopped, Multi-Function Check-sealing design.
降低排水噪音，防下水道臭氣和阻止蟲類通行，多功能通止密封設計。
2. Made of SUS 304 Stainless Steel and Plastic for long operating life.
使用 SUS 304 不鏽鋼和塑膠材料製造，可供長久使用。

